

PK 7.001K SLD 3
PK 7.501K SLD 5

PALFINGER

LIFETIME EXCELLENCE


POWERFUL PARTNER FOR MUNICIPAL JOBS




PERFECT DIMENSIONS

PK 7.001K SLD 3

STD

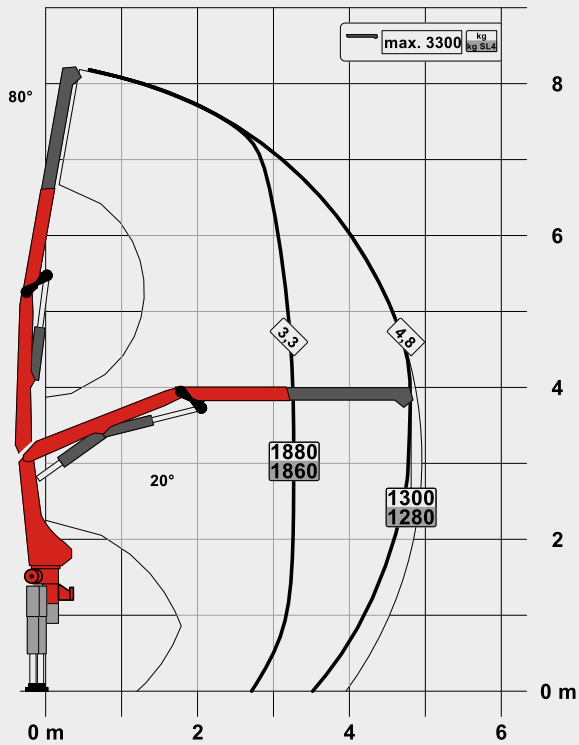


A

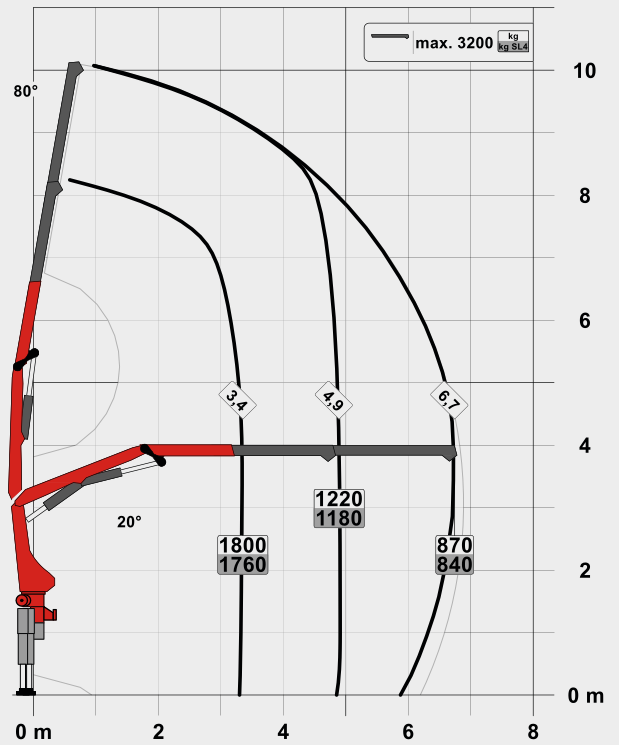


PK 7.501K SLD 5


STD

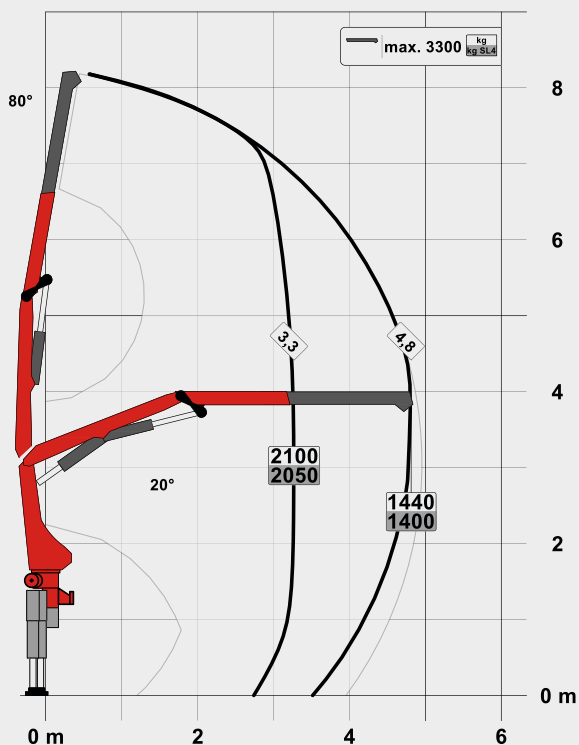

A

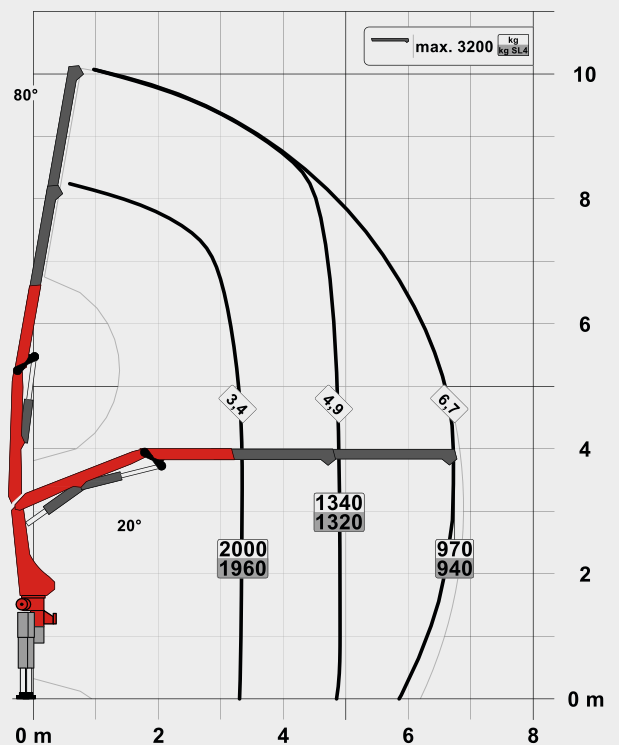

B

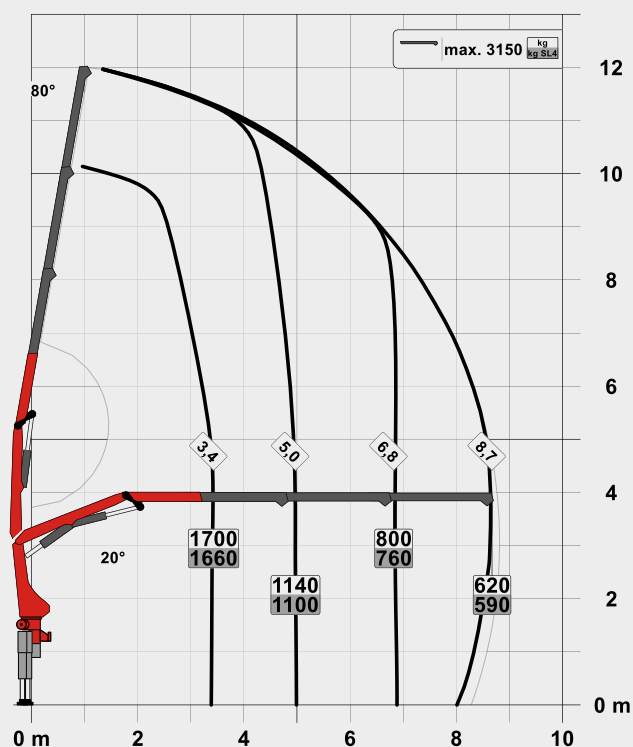


SLD 3

- Single Link
- Paltronic overload protection
- Stability monitoring system ISC-S
- Optional:
 - Stability monitoring system HPSC-L, HPSC-E
 - Radio remote control
- CE model

TECHNICAL SPECIFICATIONS

Classification	EN 12999 HC1 HD4/S2	
Max. lifting moment	6.2 mt / 60.9 kNm	44910 ft.lb
Max. lifting capacity	3300 kg / 32.4 kN	7300 lb
Max. hydraulic outreach	8.8 m	28' 11"
Max. manual outreach	12.4 m	40' 8"
Slewing angle	400°	
Slewing torque	0.8 mt / 7.8 kNm	5750 ft.lb
Stabiliser spread (std./max.)	3.0 m / 5.0 m	9' 10" / 16' 3"
Fitting space required (std.)	0.66 m	2' 2"
Width folded	2.2 m	7' 3"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 20 l/min to 30 l/min	5.3 US gpm to 7.9 US gpm
Dead weight (std.)	735 kg	1620 lb

B

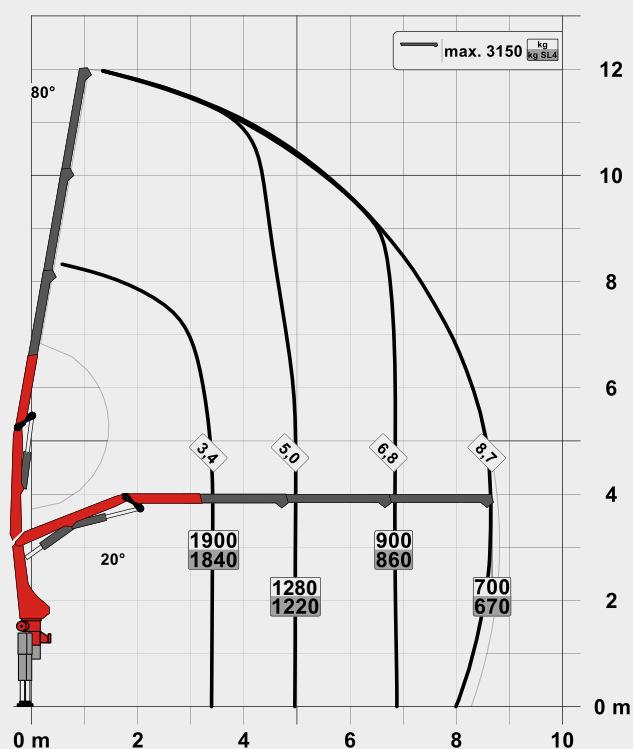

SLD 5

- Single Link
- Paltronic overload protection
- E-HPLS
- Load Sensing valve
- Radio remote control with LED display
- Stability monitoring system ISC-S
- Optional:
 - Stability monitoring system HPSC-L, HPSC-E
- CE model

TECHNICAL SPECIFICATIONS

Classification	EN 12999 HC1 HD4/S2	
Max. lifting moment	6.9 mt / 67.4 kNm	49690 ft.lb
Max. lifting capacity	3300 kg / 32.4 kN	7280 lb
Max. hydraulic outreach	8.8 m	28' 11"
Max. manual outreach	12.4 m	40' 8"
Slewing angle	400°	
Slewing torque	0.8 mt / 7.8 kNm	5750 ft.lb
Stabiliser spread (std./max.)	3.0 m / 5.0 m	9' 10" / 16' 3"
Fitting space required (std.)	0.67 m	2' 2"
Width folded	2.2 m	7' 3"
Max. operating pressure	360 bar	5220 psi
Recommended pump capacity	from 30 l/min to 40 l/min	7.9 US gpm to 10.6 US gpm
Dead weight (std.)	765 kg	1690 lb

DIMENSIONS

