

PK 25001 EL


Performance

PALFINGER CRANE




EFFICIENT BUILDING CRANE


The PK 25001 EL *Performance* has been specially designed to overcome the challenges faced in the roofing and tiling business. For these businesses, this crane simply fits the bill exactly. It has not only a great outreach, but also a tremendous working speed – thus making it the ideal building crane.




PK 25001 EL Performance A

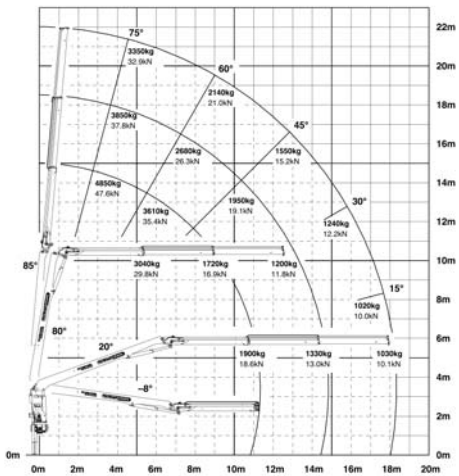

PK 25001 EL Performance B

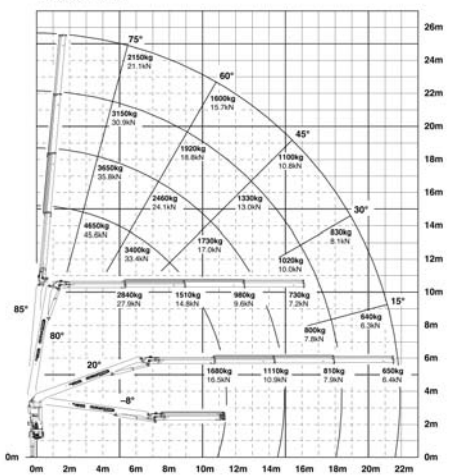


PK 25001 EL Performance C

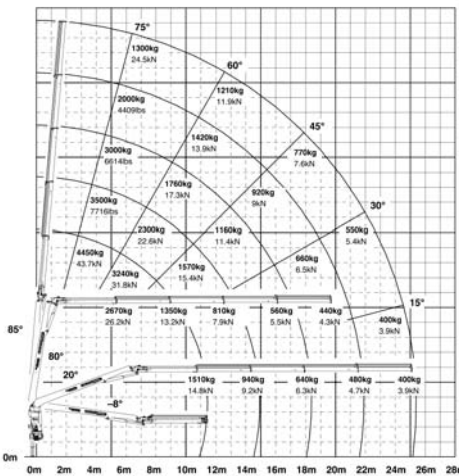

PK 25001 EL Performance		
Technical Specifications (EN 12999 H1-B3)		
Max. lifting moment	23.4 mt/230.0 kNm	169580 ft.lbs
Max. lifting capacity	4850 kg/47,6 kN	10690 lbs
Max. hydraulic outreach	25.5 m	83' 8"
Max. mechanical outreach	32.5 m	106' 8"
Slewing angle	endlos	endless

PK 25001 EL Performance			
Standard crane			
Slewing torque	1 Gear	3.3 mt/32.0 kNm	23590 ft.lbs
	2 Gear	4.1 mt/40.2 kNm	29640 ft.lbs
Outreach		18.3 m	60' 2"
Max. operating pressure		330 bar	4785 psi
Recommended pump capacity RC, LC-system	from 70 l/min	15.4 imp.gal/min	18.5 US gal./min
	to 90 l/min	19.8 imp.gal/min	23.8 US gal./min
Dead weight standard crane		3298 kg	7270 lbs

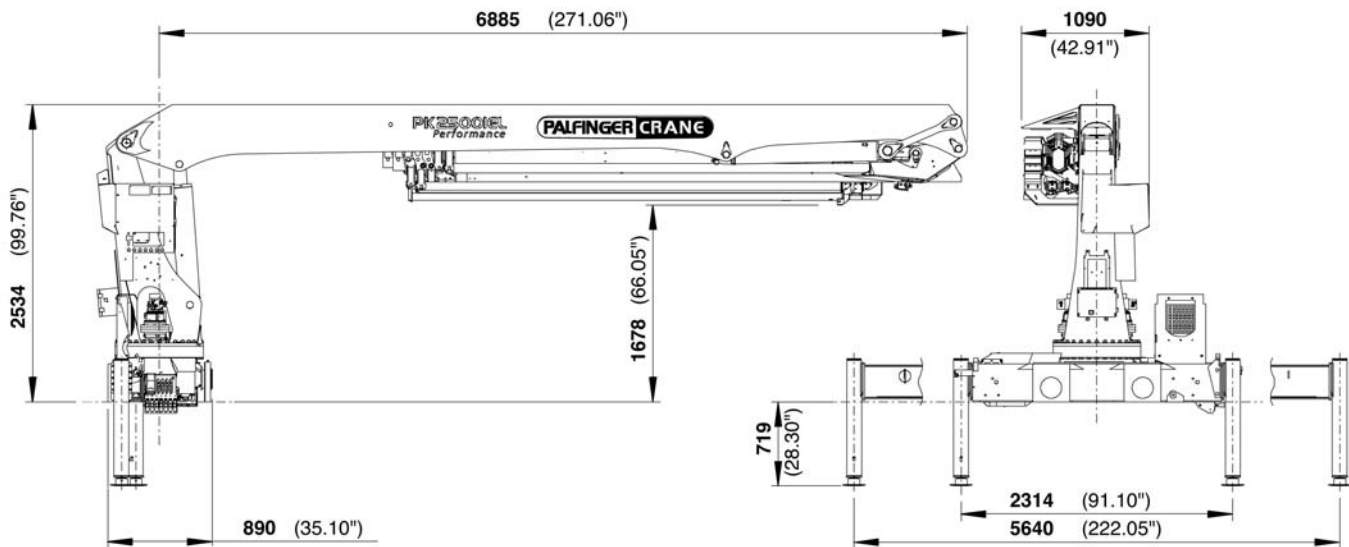

Applications shown in the leaflet do not correspond to the standard specifications. Design and specification are subject to change without prior notice.