

PK 20001 K

PALFINGER

LIFETIME EXCELLENCE


ITS SHORT BOOM SYSTEM PROVES TO BE AN ENORMOUS ADVANTAGE PARTICULARLY WHEN HANDLING PALLETS




PK 20001 K

HIGH PERFORMANCE



A

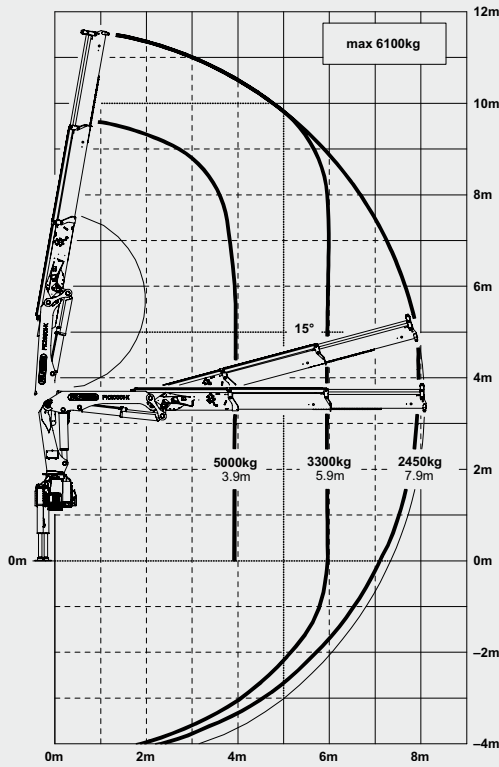



B

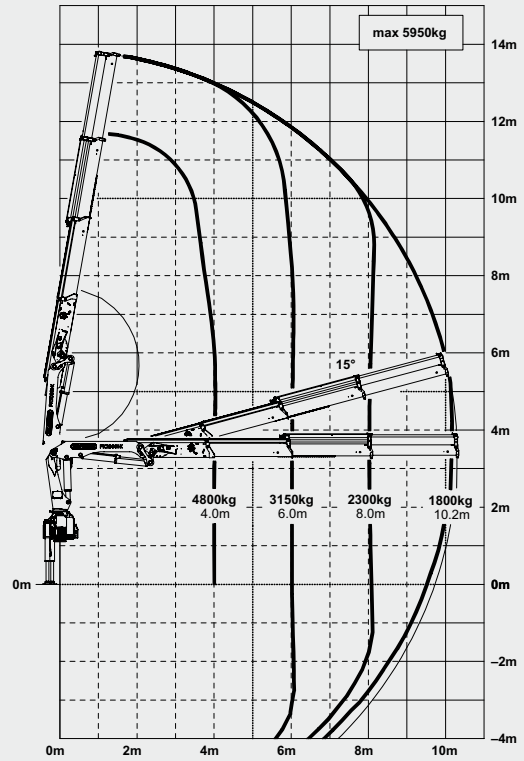

DIMENSIONS

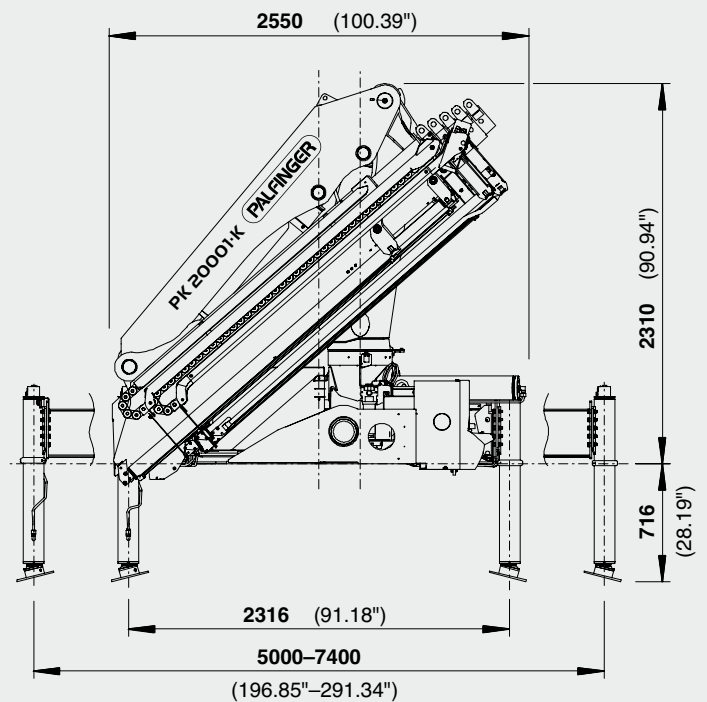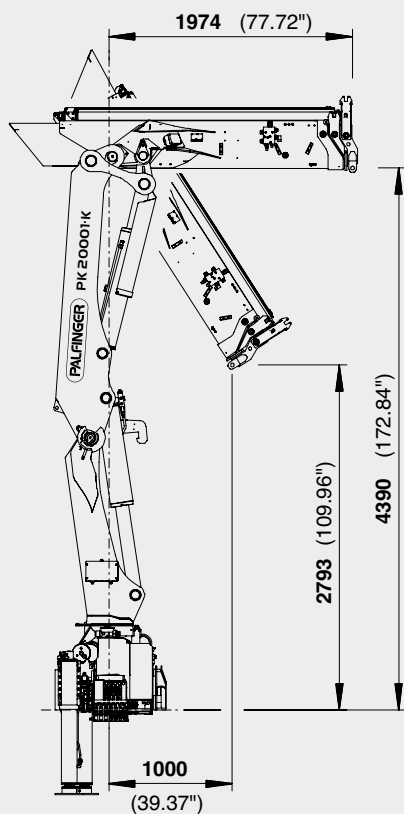

C

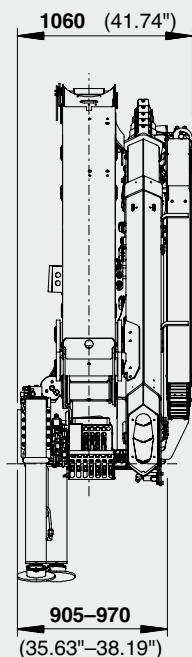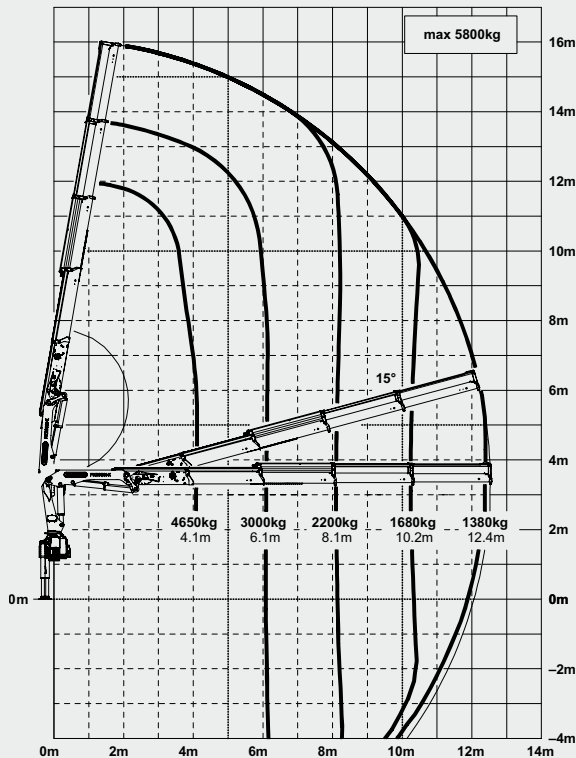

➤ High value retention due to KTL coating

➤ Additional applications due to Single Link Plus

➤ Maximum utilisation of the working range due to HPSC

➤ Higher payloads due to intelligent lightweight design

➤ Shorter load cycle times due to High Speed Extension



TECHNICAL SPECIFICATIONS (EN 12999 HC1 HD4/B3)

Max. lifting moment	20.2 mt/198.0 kNm	146030 ft.lbs
Max. lifting capacity	6100 kg/59.8 kN	13500 lbs
Max. hydraulic outreach	12.5 m	41' 0"
Max. manual outreach	16.9 m	55' 5"
Slewing angle	400°	
Slewing torque	2.3 mt/22.6 kNm	16640 ft.lbs
Stabiliser spread (std./max.)	5.0 m/7.4 m	16' 5"/24' 3"
Fitting space required (std.)	0.91 m	2' 12"
Width folded	2.55 m	8' 4"
Max. operating pressure	320 bar	4640 psi
Recommended pump capacity	from 45 l/min to 65 l/min	11.9 US gal./min 17.2 US gal./min
Dead weight (std.)	2271 kg	5010 lbs



* Optional features / country-specific equipment

LIFETIME EXCELLENCE

PALFINGER LOADER CRANES ARE CONVINCING DUE TO THEIR SUPERIOR LIFE-CYCLE PERFORMANCE. THEY ARE THE MOST ECONOMICAL AND ALSO THE MOST RELIABLE OVER THE ENTIRE PRODUCT LIFE. FROM SOLUTION FINDING TO RESALE.

**BETTER
SOLUTIONS**

**BETTER
EFFICIENCY**

**BETTER
ERGONOMICS**

**HIGHER VALUE
RETENTION**



**HIGHER
AVAILABILITY**

**HIGHER
SERVICEABILITY**

**BETTER
ECOLOGY**

**MORE
RELIABILITY**

For further information please visit: www.palfinger.com/thebrand