

PK 5.001 SLD 1
PK 5.001 SLD 3
PK 5.501 SLD 5

PALFINGER


LIFETIME EXCELLENCE

**THE CRANE GEOMETRY IS SIGNIFICANTLY
IMPROVED DUE TO THE LINKAGE SYSTEM**




PK 5.001 SLD 1 (NON-CE)


STD

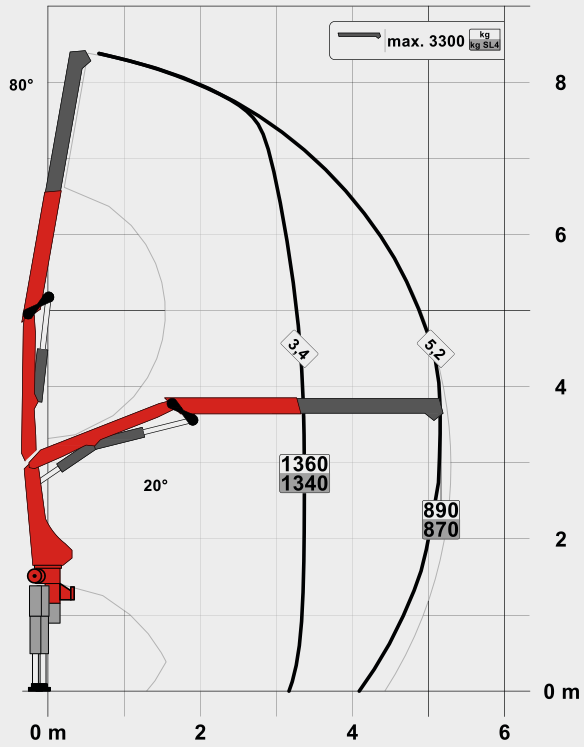

A

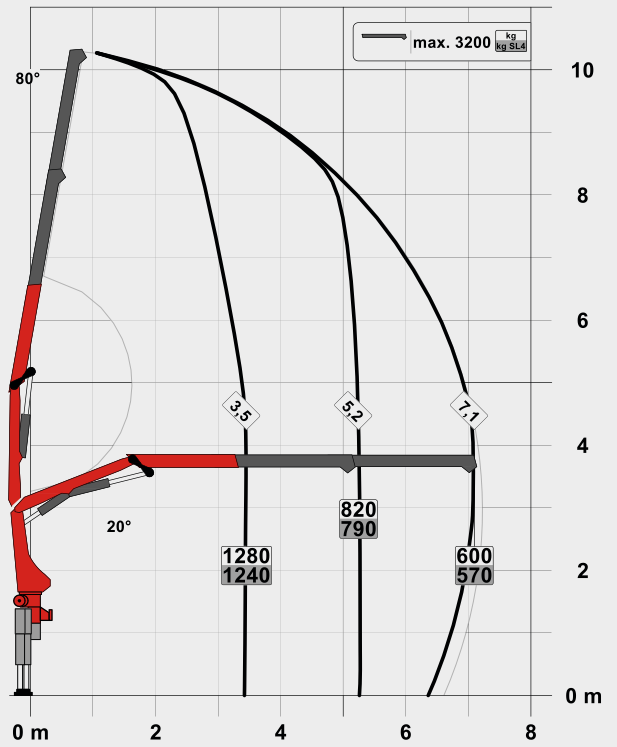


C

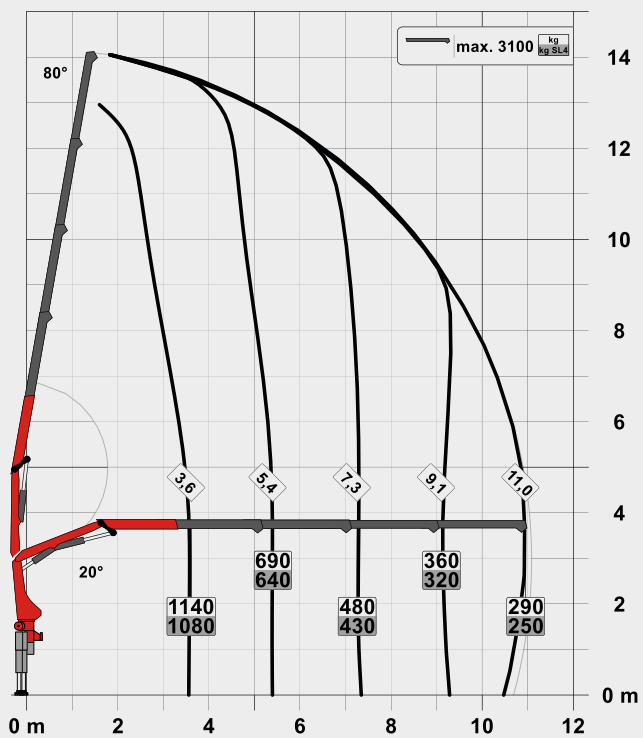

PERFECT DIMENSIONS

B

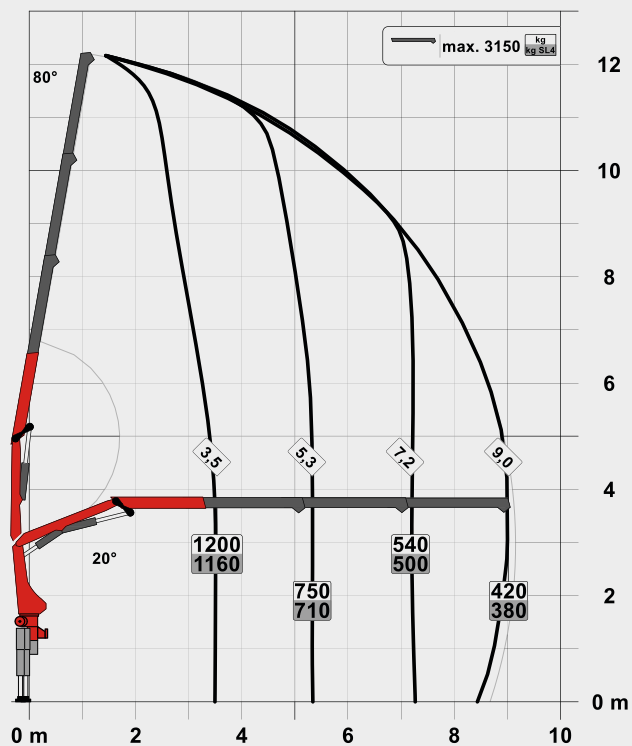

SLD 1 (NON-CE)


- Single Link
- Optional:
 - Overload protection OSK
 - Radio remote control
- NON-CE model

TECHNICAL SPECIFICATIONS


Classification	EN 13001 HC1 HD4/S2	
Max. lifting moment	4.6 mt/45.0 kNm	33190 ft.lb
Max. lifting capacity	3300 kg/32.4 kN	7300 lb
Max. hydraulic outreach	11.1 m	36' 5"
Max. manual outreach	12.7 m	41' 8"
Slewing angle	400°	
Slewing torque	0.6 mt/5.9 kNm	4350 ft.lb
Stabiliser spread (std./max.)	2.9 m/ 5.0 m	9' 6"/ 16' 3"
Fitting space required (std.)	0.66 m	2' 2"
Width folded	2.10 m	6' 11"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 15 l/min	4.0 US gpm
	to 25 l/min	6.6 US gpm
Dead weight (std.)	695 kg	1530 lb

PK 5.001 SLD 3


STD

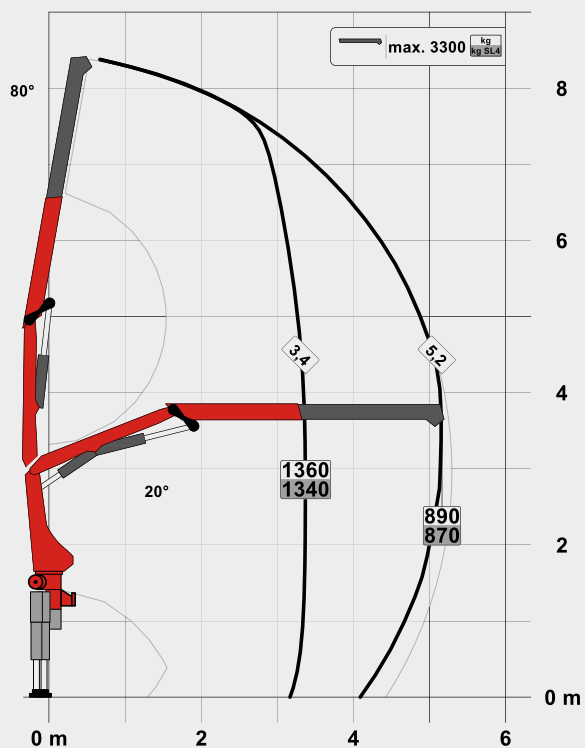

A

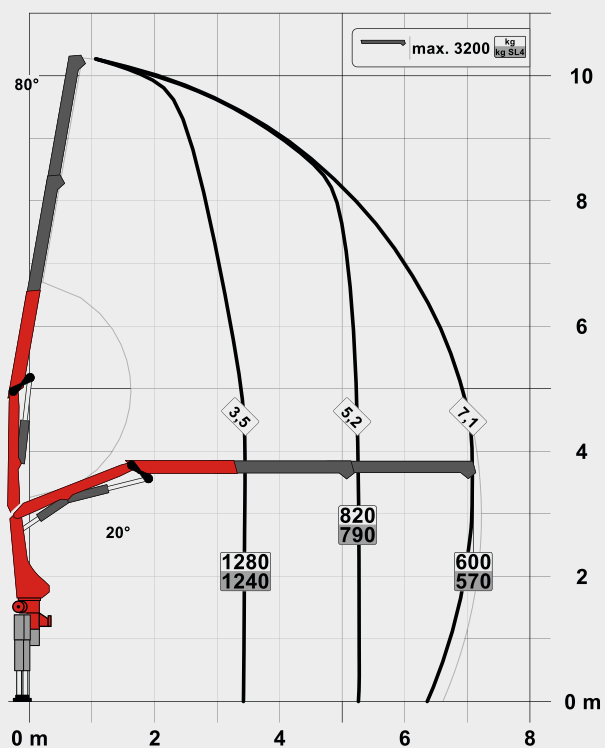


C

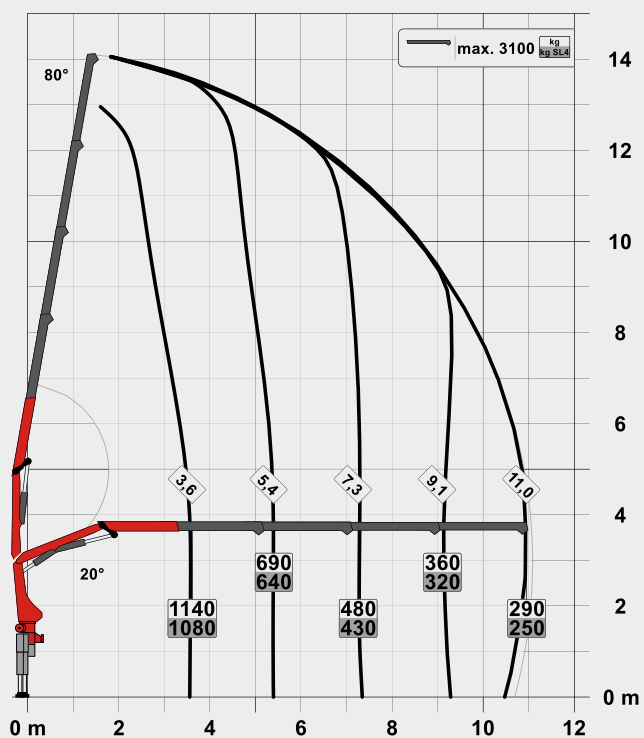

PERFECT DIMENSIONS

B

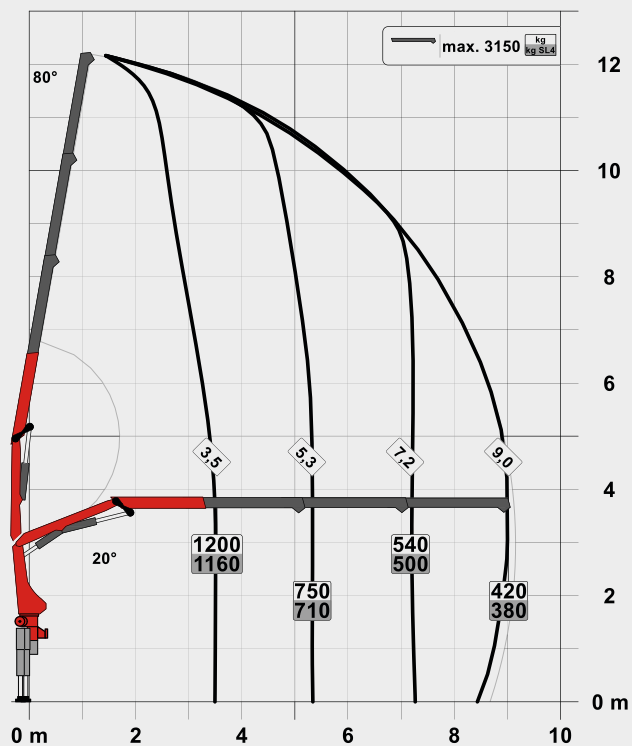

SLD 3


- Single Link
- Paltronic overload protection
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
 - Radio remote control
- NON-CE and CE model

TECHNICAL SPECIFICATIONS


Classification	EN 13001 HC1 HD4/S2	
Max. lifting moment	4.6 mt/45.0 kNm	33190 ft.lb
Max. lifting capacity	3300 kg/32.4 kN	7300 lb
Max. hydraulic outreach	11.1 m	36' 5"
Max. manual outreach	12.7 m	41' 8"
Slewing angle	400°	
Slewing torque	0.6 mt/5.9 kNm	4350 ft.lb
Stabiliser spread (std./max.)	2.9 m/ 5.0 m	9' 6"/ 16' 3"
Fitting space required (std.)	0.66 m	2' 2"
Width folded	2.10 m	6' 11"
Max. operating pressure	330 bar	4785 psi
Recommended pump capacity	from 15 l/min	4.0 US gpm
	to 25 l/min	6.6 US gpm
Dead weight (std.)	695 kg	1530 lb

PK 5.501 SLD 5


STD

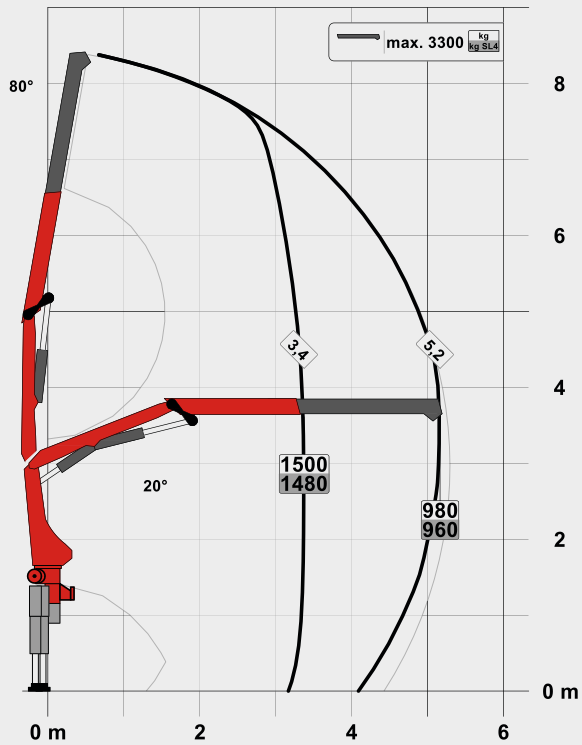

A

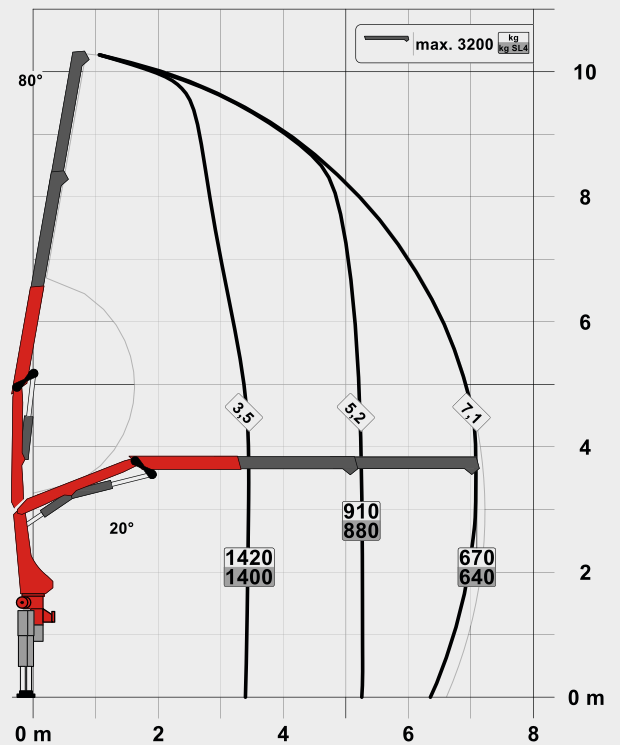


C

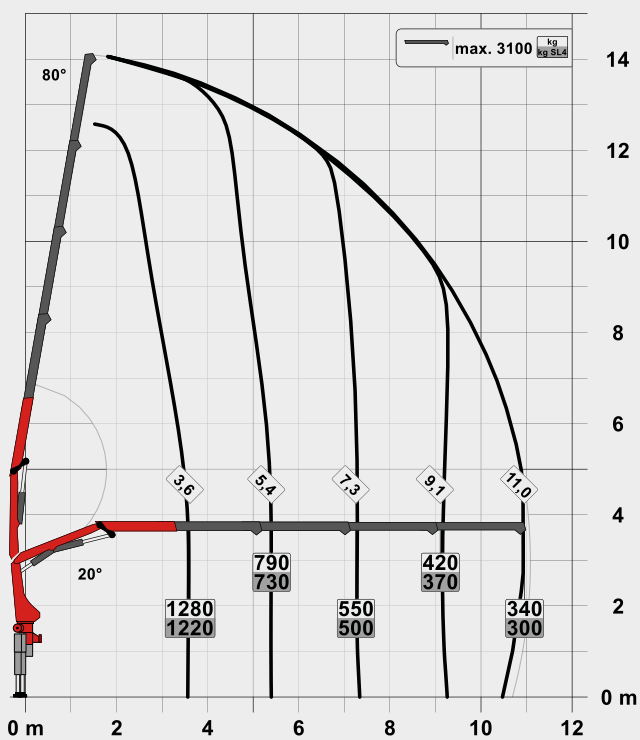

PERFECT DIMENSIONS

B

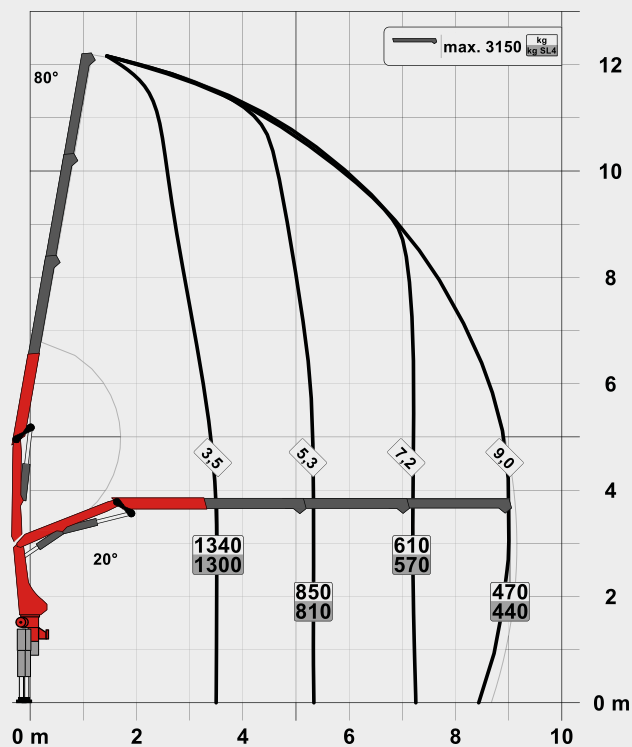

SLD 5

- Single Link
- Paltronic overload protection
- E-HPLS
- Load Sensing valve
- Radio remote control with LED display
- Optional:
 - Stability monitoring system ISC-S (standard for CE), HPSC-L, HPSC-E
- NON-CE and CE model

TECHNICAL SPECIFICATIONS

Classification	EN 13001 HC1 HD4/S2	
Max. lifting moment	5.1 mt/49.8 kNm	36730 ft.lb
Max. lifting capacity	3300 kg/32.4 kN	7300 lb
Max. hydraulic outreach	11.1 m	36' 5"
Max. manual outreach	12.7 m	41' 8"
Slewing angle	400°	
Slewing torque	0.6 mt/5.9 kNm	4350 ft.lb
Stabiliser spread (std./max.)	2.9 m/ 5.0 m	9' 6"/ 16' 3"
Fitting space required (std.)	0.66 m	2' 2"
Width folded	2.10 m	6' 11"
Max. operating pressure	360 bar	5220 psi
Recommended pump capacity	from 20 l/min	5.3 US gpm
	to 30 l/min	7.9 US gpm
Dead weight (std.)	725 kg	1600 lb

DIMENSIONS

